

BIOTECH


.....

TUBi

.....

TUBING YOUR WAY



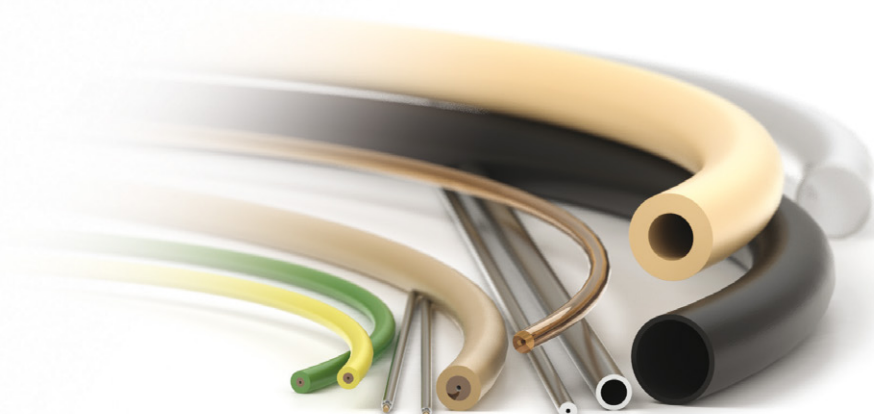

TUBi - TUBING YOUR WAY

Tubing is an essential part of every fluidic system. With our knowledge in the field we can assist you in finding the most suitable tubing solution for your needs. It is easy, smart and economical to ask us first. You will get tubing your way. We have a wide range of high quality tubing of different material, OD & ID and color. Furthermore we offer clean room manufactured tubing and standard to extreme tolerances on OD & ID. Our OEM solutions include customized solutions with pre-cut tubing, mounted fittings, packaging with your label and much more.

HOW TO ORDER YOUR TUBING

STANDARD



MATERIAL



OD & ID



COLOR






MATERIAL


Wide variety of materials of highest quality.

- PEEK
- PTFE
- ETFE
- FEP
- PFA
- PVDF
- PE
- PP
- EVA, EMA, EBA
- POM
- PET, PBT
- PC
- PA
- Stainless Steel

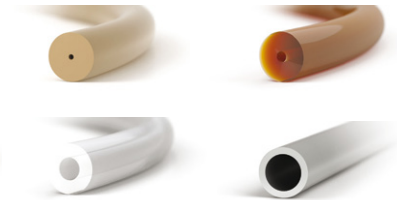

OD & ID

All common dimensions as well as more unusual options.

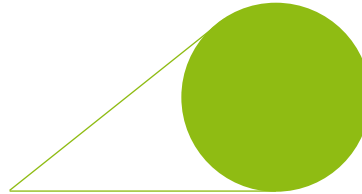


From 0.1 mm to 25 mm




COLOR

Natural or colorful.



OEM SOLUTIONS & OPTIONS



LENGTH & FITTINGS



FLANGED OR THERMOFORMED



PRINTED OR TUBING MARKERS



CLEAN ROOM MANUFACTURED



PEEK - PolyEtherEtherKetone

PEEK polymer is the flagship member of the poly(aryl)etherketone family of polymers. It has excellent chemical resistance to virtually all commonly used solvents. However, the following solvents are usually not recommended for use with PEEK: nitric acid; sulfuric acid; halogenated acids, such as hydrofluoric acid and hydrobromic acid (hydrochloric acid is approved for use in most applications); and pure halogenated gases. Additionally,

due to a swelling effect, be cautious in using the following solvents with PEEK tubing: methylene chloride, THF, and DMSO in any concentration and acetonitrile in higher concentrations. Excellent thread strength.



FLUOROPOLYMERS

PTFE - PolyTetraFluoroEthylene

The stability of the carbon-fluorine bond in combination with the very high polarity of the fluorine atom will create the unique properties of the high crystalline PTFE paste fluoropolymer. These properties are unlikely to be beaten by any other plastic material. The physiological inertness of the polymer makes PTFE ideal for medical applications. Since PTFE does not melt, it has to be paste-extruded, followed by sintering to obtain its final properties.

- **Outstanding low friction properties and non-stick characteristics.**
- **Outstanding chemical resistance.**
- **Excellent resistance to aging.**
- **Outstanding continuous service temperature from -200°C up to +260°C.**

ETFE - Ethylene TetraFluoroEthylene

ETFE is a copolymer of ethylene and tetrafluoroethylene. ETFE is stiff, tough and has a higher resistance to wear than most fluoropolymers.

- **Excellent non-stick characteristics**
- **Low liquid permeability**
- **Good resistance to radiation**
- **High light transmission**



FEP - Fluorinated Ethylene Propylene

FEP is a copolymer of tetrafluoroethylene and hexafluoropropylene with a linear molecule chain. FEP has almost the same characteristics as PTFE and is transparent, even though it is a semi-crystalline polymer.

- **Excellent low friction properties and non-stick characteristics**
- **Excellent chemical resistance**
- **Outstanding continuous service temperature from -200°C up to +200°C**
- **Extremely smooth surface**

PFA - PerFluoroAlkoxy

PFA is a transparent perfluoroalkoxy copolymer that is considered to be the thermoplastic fluoropolymer with the closest properties to PTFE, whilst being melt processable.

- **Low friction properties and non-stick characteristics**
- **Outstanding chemical resistance**
- **Outstanding service temperatures up to +260°C**
- **High light transmission**

PVDF - PolyVinylidene Fluoride

PVDF is a polymer of vinylidene fluoride. PVDF is stiffer and has a higher mechanical strength and resistance to wear than ETFE.

- **Good chemical resistance**
- **Excellent abrasion resistance**
- **Excellent aging resistance**
- **Smooth surfaces**



THERMOPLASTIC POLYMERS

PE - PolyEthylene

PE is categorised by the density of the polymer, LDPE (low density), MDPE (medium density) and HDPE (high density). A higher crystallinity will produce a higher density, higher melt temperature, higher strength, and a lower permeability to gases and moisture. Polyethylene is a relatively inexpensive polymer that is widely used in medical applications.

- **Low friction properties (HDPE)**
- **Good chemical resistance**
- **Service temperature up to +100°C (HDPE)**

PP - PolyPropylene

PP is a semi-crystalline polymer with wide versatility. PP is rather rigid and is frequently used when slightly better mechanical characteristics than HDPE are required.

- **High fatigue resistance**
- **Good chemical resistance**
- **Service temperature up to +100°C**

EVA - Ethylene Vinyl Acetate

EMA - Ethylene Methyl Acrylate

EBA - Ethylene Butyl Acrylate

Copolymers of ethylene and polar monomers (vinyl-acetate, methylacrylate or butylacrylate), are used to produce materials with various properties of stickiness, toughness and impact resistance.

- **Flexible**
- **High impact resistance**
- **High toughness**

POM - PolyOxiMethylene

POM is a highly crystalline polymer commonly named "acetal". POM is a very hard, strong, dimension stable, opaque polymer, which is an effect of high crystallinity.

- **Low friction properties**
- **High strength and hardness**
- **High wear resistance**
- **Low absorption and permeability of water**

PET - PolyEthylene Terephthalate

PBT - PolyButylene Terephthalate

PET and PBT are two of the most commonly used polyesters. PET has a slow crystallisation process compared to all other polymers. PBT is more flexible and tougher than PET.

- **High strength and hardness**
- **High dimension stability**
- **Good chemical resistance**

PC - PolyCarbonate

PC is a polyester of carbonic acid that has an amorphous structure to provide transparency. PC is used for its toughness and strength.

- **High strength and toughness**
- **Good transparency**
- **High dimension stability**
- **Extreme impact resistance**

PA - PolyAmide

PA is a group of semi-crystalline thermoplastics, often referred to as Nylon®. The number of carbon atoms between the functional amide groups in PA produces different properties of this polymer with names such as PA6, PA11 and PA12 indicating these numbers. Absorption of water decreases with increasing numbers of carbon atoms.

- **High strength, stiffness and hardness**
- **Good wear resistance**
- **Service temperature up to +150°**




STAINLESS STEEL

Our thorough preparation and cleaning procedure guarantees tubing that is truly ready-to-use, with flat, burr-free ends and a clean finish. This care is important in achieving zero-dead-volume connections and good chromatographic results. We offer a variety of precut lengths as well as longer lengths (5' and 25') of some sizes. Tubing OD 1/32", 1/16" and 1/8".

TAILOR MADE TUBING - OEM SOLUTIONS

Ready-to-send kits with the tubing in desired lengths and the fittings you need; attached, labeled and packed! We help you choose the best fittings and tubing for every application!




LENGTH & FITTINGS

WE HELP YOU EVERY STEP OF THE WAY:


- Wide selection of fittings and tubing
- Filters, tools, tubing markers and accessories
- Labeling with your logo and company details
- Packaging in boxes or plastic bags
- Long experience in this business
- We help you to find solutions for your needs


We can mount easy-to-use fittings to your tubes. All for your convenience. Nicely pre-cut tubing of desired length.



FLANGED OR THERMO FORMED


If you prefer a flanged end of the tube, or a thermo formed tube - let us know. We also manufacture knitted reaction/delay coils.

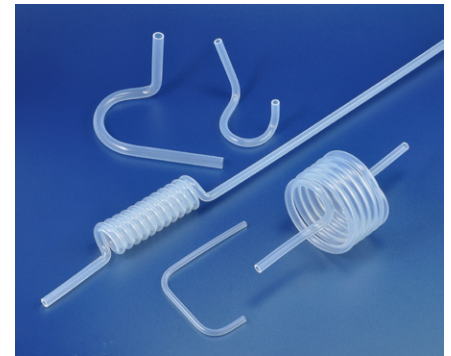



PRINTED OR TUBING MARKERS

Make your system easy to use with printed tubes or a colored tubing marker.

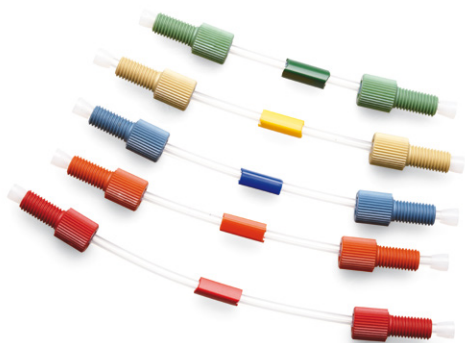


CLEAN ROOM MANUFACTURED

If you have high demands regarding cleanness we can offer clean room manufactured tubing.




MARVELXACT™

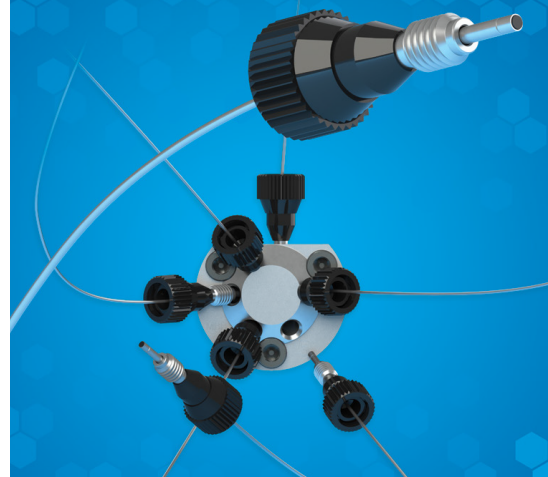

MARVELXACT EXACT PERFORMANCE Finger-tight UHPLC connection system

- Finger-tight to UHPLC (19 000 psi)
- Reusable more than 100x
- Zero Dead Volume
- No Peak Tailing - High Efficiency
- Biocompatible & Flexible
- Robust Tip Minimizes the risk of Damage
- Exact tightening with a "click" makes the connection perfect every time

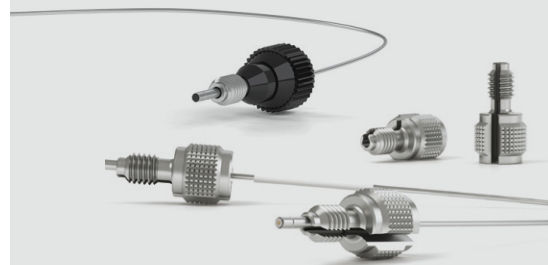



INNOVATIVE PRODUCTS FOR FLUIDIC SYSTEMS



www.biotech.se

LOCAL DISTRIBUTOR



USA

BIOTECH USA LLC
PO Box 18796
MN 55418 Minneapolis, USA
TEL: 612-703-5718
sales@biotechusa.us
www.biotech.se



HEADQUARTER

BIOTECH AB
Råövägen 300
SE-439 92 Onsala, Sweden
TEL: +46 (0)300 56 91 80
info@biotech.se
www.biotech.se



JAPAN

BIONIK INC.
3397-19 Obuchi
Fuji, Shizuoka, 417-0801, Japan
TEL: +81-545-38-9125
info@bionikinc.com
www.bionikinc.com